

Key Factory Method Operators in the Flux Class (Part 5)

Douglas C. Schmidt

d.schmidt@vanderbilt.edu

www.dre.vanderbilt.edu/~schmidt

Professor of Computer Science

Institute for Software
Integrated Systems

Vanderbilt University
Nashville, Tennessee, USA



Learning Objectives in this Part of the Lesson

- Recognize key Flux operators
 - Concurrency & scheduler operators
 - Factory method operators
 - These operators create Flux streams in various ways in various Scheduler contexts
 - i.e., the two param version of create()



Key Factory Method Operators in the Flux Class

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow

```
static <T> Flux<T> create  
(Consumer<? super FluxSink<T>>  
emitter, FluxSink  
.OverflowStrategy  
backpressure)
```

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Param 1 emits any # of next() signals followed by zero or one error() or complete() signals

```
static <T> Flux<T> create
(Consumer<? super FluxSink<T>>
 emitter, FluxSink
 .OverflowStrategy
 backpressure)
```

Interface FluxSink<T>

Type Parameters:

T - the value type

```
public interface FluxSink<T>
```

Wrapper API around a downstream Subscriber for emitting any number of next signals followed by zero or one onError/onComplete.

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Param 1 emits any # of next() signals followed by zero or one error() or complete() signals
 - Supports more dynamic use cases than the Flux just() & fromIterable() operators

```
static <T> Flux<T> create  
(Consumer<? super FluxSink<T>>  
emitter, FluxSink  
.OverflowStrategy  
backpressure)
```



Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Param 1 emits any # of next() signals followed by zero or one error() or complete() signals
 - Param 2 defines strategies for handling overflow

```
static <T> Flux<T> create
(Consumer<? super FluxSink<T>>
emitter, FluxSink
.OverflowStrategy
backpressure)
```

Enum Constants
Enum Constant and Description
BUFFER Buffer all signals if the downstream can't keep up.
DROP Drop the incoming signal if the downstream is not ready to receive it.
ERROR Signal an <code>IllegalStateException</code> when the downstream can't keep up
IGNORE Completely ignore downstream backpressure requests.
LATEST Downstream will get only the latest signals from upstream.

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Param 1 emits any # of next() signals followed by zero or one error() or complete() signals
 - Param 2 defines strategies for handling overflow

```
static <T> Flux<T> create  
(Consumer<? super FluxSink<T>>  
emitter, FluxSink  
.OverflowStrategy  
backpressure)
```

"backpressure" is an odd choice of terms here



Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Param 1 emits any # of next() signals followed by zero or one error() or complete() signals
 - Param 2 defines strategies for handling overflow
 - Returns a Flux that emits all the elements generated by the FluxSink

```
static <T> Flux<T> create
(Consumer<? super FluxSink<T>>
emitter, FluxSink
.OverflowStrategy
backpressure)
```

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow

Flux


```
.create(makeEmitter(count,  
sb),
```

FluxSink

```
.OverflowStrategy  
.ERROR)
```

```
...
```

```
.subscribe  
(blockingSubscriber);
```

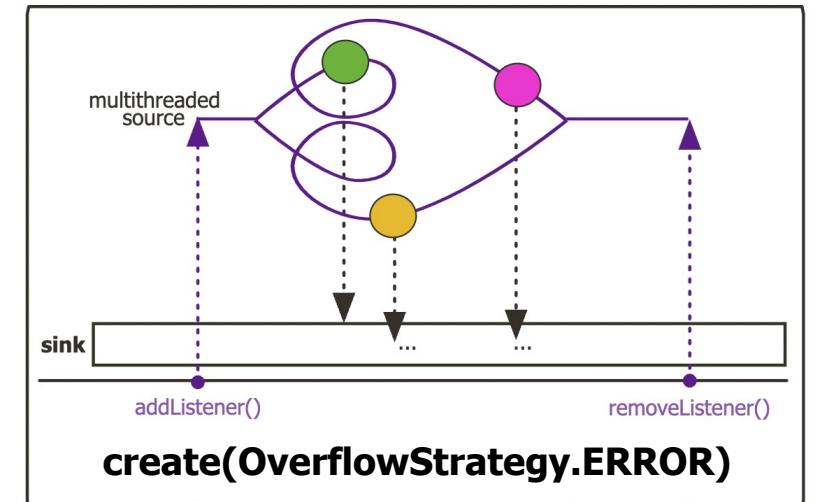

Rapidly emit a stream of random BigFraction objects in one fell swoop

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow

Flux


```
.create(makeEmitter(count,  
sb),
```

FluxSink

```
.OverflowStrategy  
.ERROR)
```



...

```
.subscribe  
(blockingSubscriber);
```

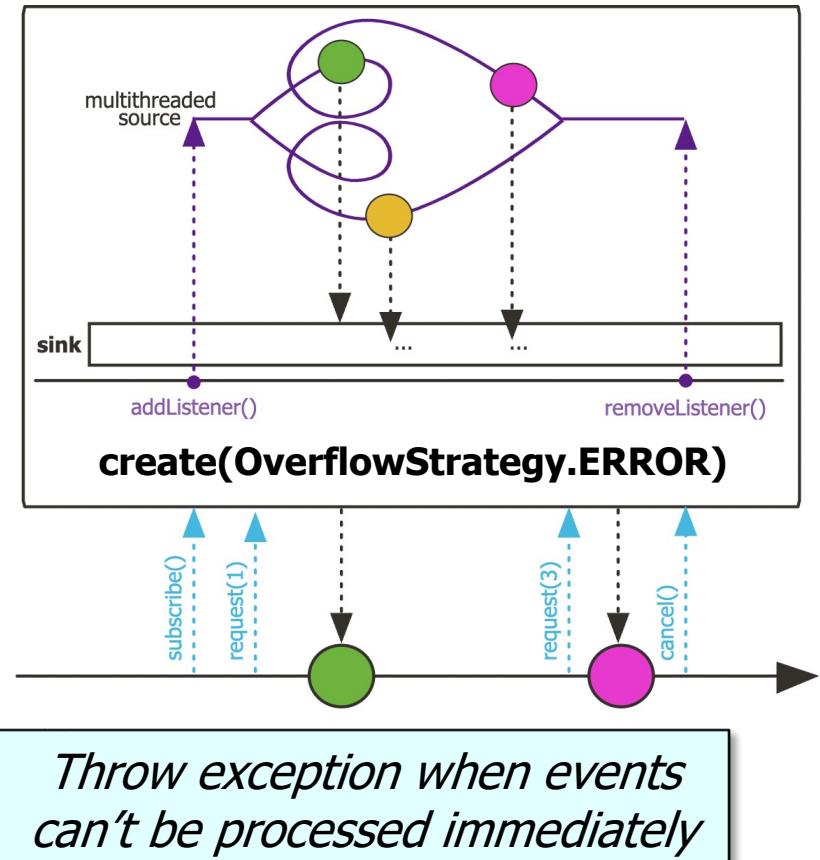

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Elements can be emitted from one or more threads

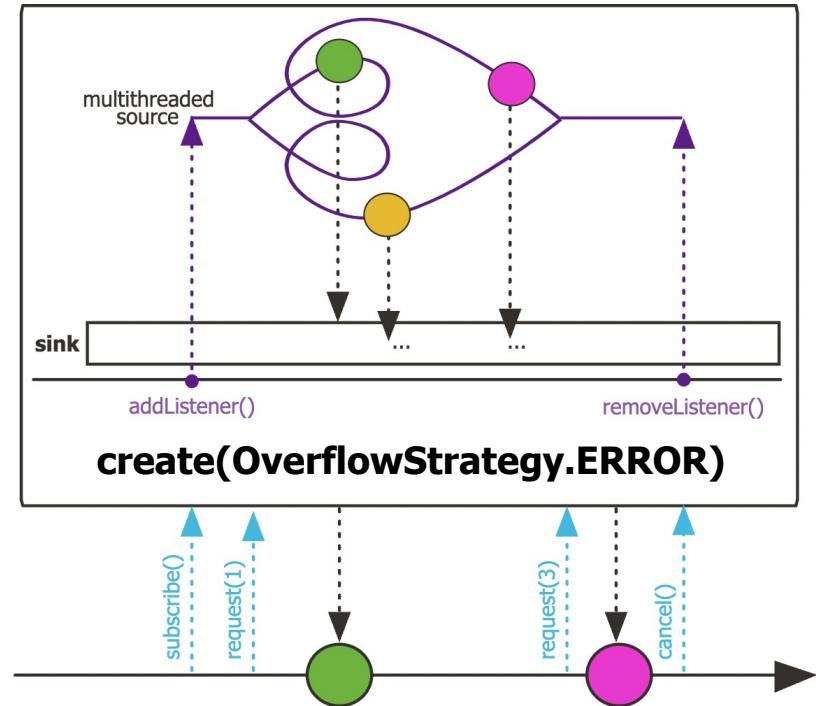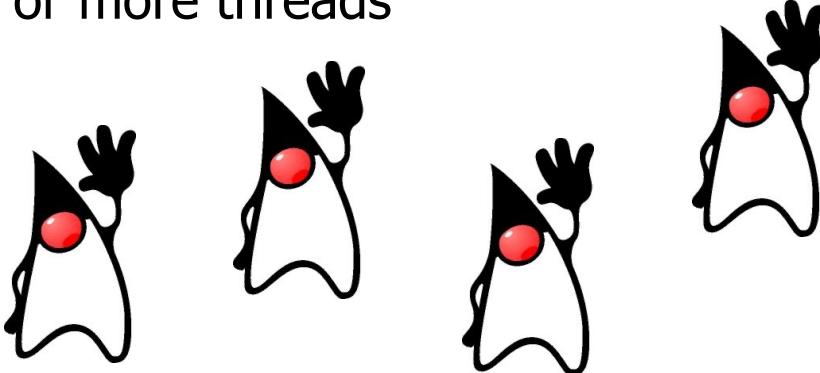

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Elements can be emitted from one or more threads
 - RxJava's Flowable.create() is similar
 - However, the data types passed to create() differ
 - i.e., FlowableOnSubscribe vs. Consumer<FluxSync>

create

```
@CheckReturnValue
@NonNull
@BackpressureSupport(value=SPECIAL)
@SchedulerSupport(value="none")
public static <T> @NonNull Flowable<T> create(@NonNull @NonNull FlowableOnSubscribe<T> source,
                                              @NonNull @NonNull BackpressureStrategy mode)
```

Provides an API (via a cold Flowable) that bridges the reactive world with the callback-style, generally non-backpressured world.

Example:

```
Flowable.<Event>create(emitter -> {
    Callback listener = new Callback() {
        @Override
        public void onEvent(Event e) {
            emitter.onNext(e);
            if (e.isLast()) {
                emitter.onComplete();
            }
        }

        @Override
        public void onFailure(Exception e) {
            emitter.onError(e);
        }
    };
    AutoCloseable c = api.someMethod(listener);
    emitter.setCancellable(c::close);
}, BackpressureStrategy.BUFFER);
```

Key Factory Method Operators in the Flux Class

- The two param create() operator
 - Create a Flux capable of emitting multiple elements synchronously or asynchronously & that handles overflow
 - Elements can be emitted from one or more threads
 - RxJava's Flowable.create() is similar
 - Java Streams generate() does not handle backpressure

Generate a stream of random, large, & unreduced big fractions

```
Stream.generate(() -> BigFractionUtils  
.makeBigFraction(new Random(),  
false))
```

generate

```
static <T> Stream<T> generate(Supplier<T> s)
```

Returns an infinite sequential unordered stream where each element is generated by the provided Supplier. This is suitable for generating constant streams, streams of random elements, etc.

Type Parameters:

T - the type of stream elements

Parameters:

s - the Supplier of generated elements

Returns:

a new infinite sequential unordered Stream

End of Key Factory Method Operators in the Flux Class (Part 5)