

Java CyclicBarrier: Structure & Functionality



Douglas C. Schmidt
d.schmidt@vanderbilt.edu
www.dre.vanderbilt.edu/~schmidt

**Institute for Software
Integrated Systems
Vanderbilt University
Nashville, Tennessee, USA**



Learning Objectives in this Part of the Lesson

- Understand the structure & functionality of Java CountdownLatch

Class `CyclicBarrier`

`java.lang.Object`
`java.util.concurrent.CyclicBarrier`

```
public class CyclicBarrier  
extends Object
```

A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. `CyclicBarriers` are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.

A `CyclicBarrier` supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

Sample usage: Here is an example of using a barrier in a parallel decomposition design:

Overview of Java CyclicBarrier

Overview of Java CyclicBarrier

- Implements another Java barrier synchronizer

```
public class CyclicBarrier {  
    ...  
}
```

Class CyclicBarrier

java.lang.Object
java.util.concurrent.CyclicBarrier

```
public class CyclicBarrier  
extends Object
```

A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. CyclicBarriers are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.


A `CyclicBarrier` supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

See docs.oracle.com/javase/8/docs/api/java/util/concurrent/CyclicBarrier.html

Overview of Java CyclicBarrier

- Implements another Java barrier synchronizer
 - Allows a set of threads to wait for each other to reach a common barrier point
 - Threads are referred to as “parties”

```
public class CyclicBarrier {  
    ...  
}
```

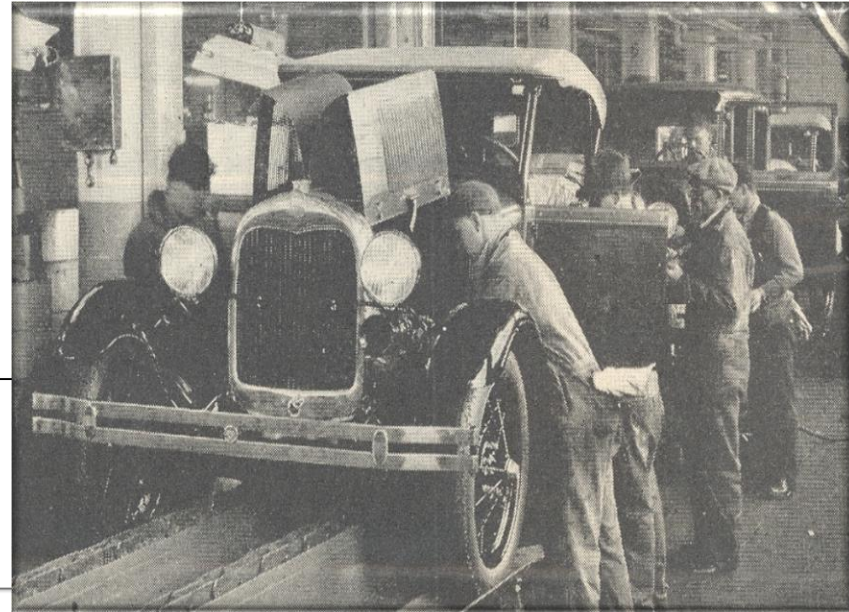

Class CyclicBarrier

```
java.lang.Object  
java.util.concurrent.CyclicBarrier
```

```
public class CyclicBarrier  
extends Object
```

A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. CyclicBarriers are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.

A CyclicBarrier supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

One human known use is an assembly line where fixed-sized groups of workers coordinate to build various parts of cars moving by in phases

Overview of Java CyclicBarrier

- Implements another Java barrier synchronizer
 - Allows a set of threads to wait for each other to reach a common barrier point
 - Well-suited for fixed-size “cyclic”, “entry”, and/or “exit” barriers

```
public class CyclicBarrier {  
    ...  
}
```



Class CyclicBarrier

```
java.lang.Object  
java.util.concurrent.CyclicBarrier
```

```
public class CyclicBarrier  
extends Object
```

A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. CyclicBarriers are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.

A CyclicBarrier supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

Overview of Java CyclicBarrier

- Implements another Java barrier synchronizer
 - Allows a set of threads to wait for each other to reach a common barrier point
 - Well-suited for fixed-size “cyclic”, “entry”, and/or “exit” barriers
 - Enables barrier to be reset manually at any point

```
public class CyclicBarrier {  
    ...  
}
```



Class CyclicBarrier

```
java.lang.Object  
    java.util.concurrent.CyclicBarrier
```

```
public class CyclicBarrier  
    extends Object
```

A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. CyclicBarriers are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.

A CyclicBarrier supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

In contrast, Java CountdownLatch does *not* enable the barrier to be reset!

Overview of Java CyclicBarrier

- Implements another Java barrier synchronizer

```
public class CyclicBarrier {  
    ...  
}
```

- Allows a set of threads to wait for each other to reach a common barrier point
- Well-suited for fixed-size “cyclic”, “entry”, and/or “exit” barriers
- Enables barrier to be reset manually at any point

*Does not implement
an interface*

Class CyclicBarrier

```
java.lang.Object  
    java.util.concurrent.CyclicBarrier
```

```
public class CyclicBarrier  
    extends Object
```


A synchronization aid that allows a set of threads to all wait for each other to reach a common barrier point. CyclicBarriers are useful in programs involving a fixed sized party of threads that must occasionally wait for each other. The barrier is called *cyclic* because it can be re-used after the waiting threads are released.

A `CyclicBarrier` supports an optional `Runnable` command that is run once per barrier point, after the last thread in the party arrives, but before any threads are released. This *barrier action* is useful for updating shared-state before any of the parties continue.

Overview of Java CyclicBarrier

- Does not apply the *Bridge* pattern


```
public class CyclicBarrier {  
    ...  
}
```

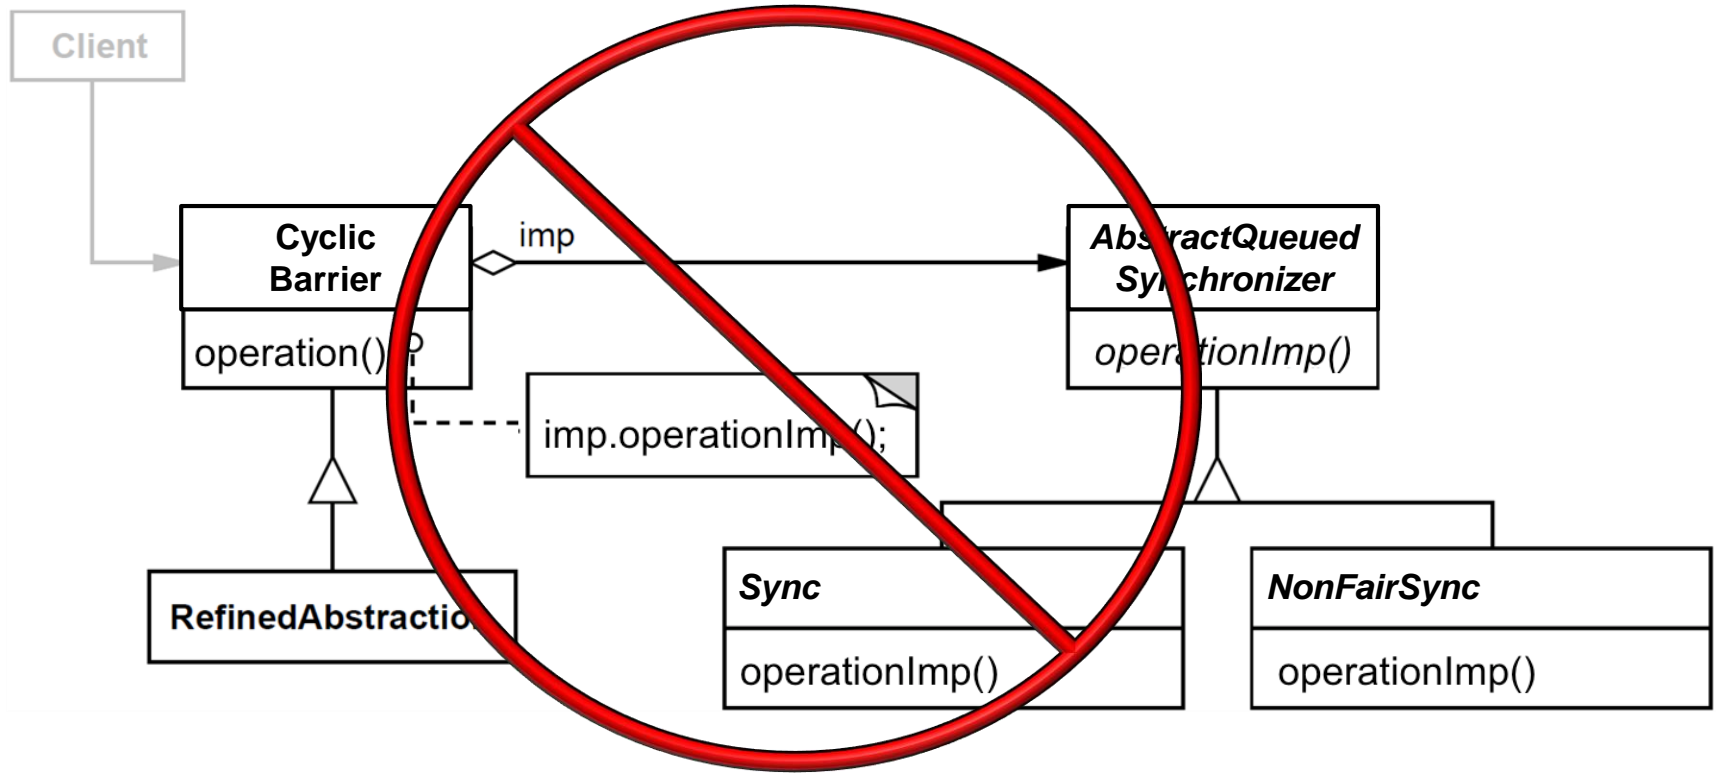

Overview of Java CyclicBarrier

- Does not apply the *Bridge* pattern
- Nor does it use the Abstract Queued Synchronizer framework

```
public class CyclicBarrier {  
    ...  
}
```

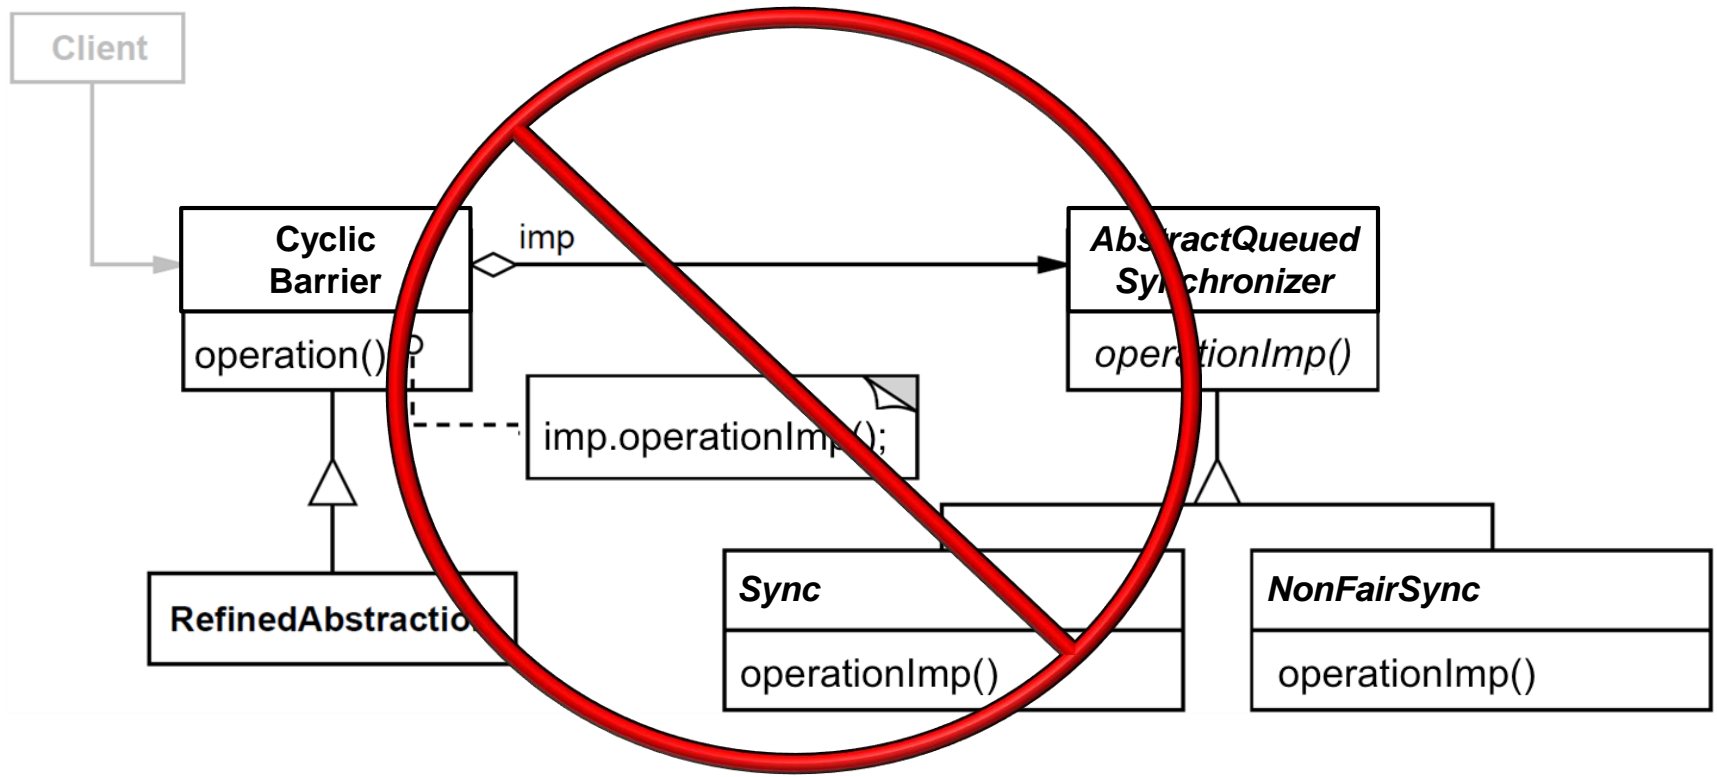

Unlike the Java ReentrantLock, ReentrantReadWriteLock, Semaphore, ConditionObject, & CountdownLatch classes

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

See <src/share/classes/java/util/concurrent/CyclicBarrier.java>

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier
- Lock that protects critical sections

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier
 - Lock that protects critical sections
- Condition to wait on until tripped

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier
 - Lock that protects critical sections
 - Condition to wait on until tripped
- The total # of parties
 - This value is initially set by the CyclicBarrier constructor

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier
 - Lock that protects critical sections
 - Condition to wait on until tripped
 - The total # of parties
 - # of parties that haven't called `await()` yet
 - Initially set to total # of parties & then decremented each time `await()` is called

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

Overview of Java CyclicBarrier

- Instead, it defines a # of fields that implement a cyclic barrier
 - Lock that protects critical sections
 - Condition to wait on until tripped
 - The total # of parties
 - # of parties that haven't called `await()` yet
- Barrier action (optional)
 - Called when barrier is "tripped" after all parties arrive

```
public class CyclicBarrier {  
    private final ReentrantLock  
        lock = new ReentrantLock();  
  
    private final Condition trip  
        = lock.newCondition();  
  
    private final int parties;  
  
    private int count;  
  
    private final Runnable  
        barrierCommand;  
  
    ...  
}
```

End of Java CyclicBarrier: Structure & Functionality