

Maximizing Processor Core Utilization with the Java Common Fork-Join Pool

Douglas C. Schmidt

d.schmidt@vanderbilt.edu

www.dre.vanderbilt.edu/~schmidt



Professor of Computer Science


**Institute for Software
Integrated Systems**

**Vanderbilt University
Nashville, Tennessee, USA**



Learning Objectives in this Part of the Lesson

- Understand how the common fork-join pool helps to maximize processor core utilization

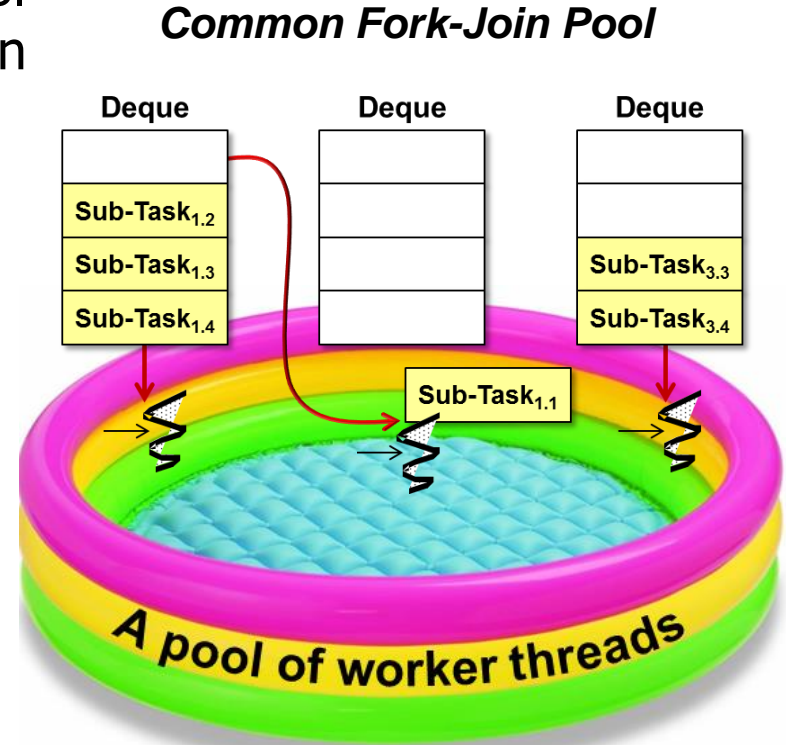

Overview of the Common Fork-Join Pool

Overview of the Common Fork-Join Pool

- A static common pool is available & appropriate for most programs



commonPool

```
public static ForkJoinPool commonPool()
```

Returns the common pool instance. This pool is statically constructed; its run state is unaffected by attempts to `shutdown()` or `shutdownNow()`. However this pool and any ongoing processing are automatically terminated upon program `System.exit(int)`. Any program that relies on asynchronous task processing to complete before program termination should invoke `commonPool().awaitQuiescence`, before exit.

Returns:

the common pool instance

Since:

1.8

Overview of the Common Fork-Join Pool

- A static common pool is available & appropriate for most programs
- This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process



Overview of the Common Fork-Join Pool

- A static common pool is available & appropriate for most programs
 - This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process
- It helps optimize resource utilization since it's aware of which cores are used globally within a process



Overview of the Common Fork-Join Pool

- A static common pool is available & appropriate for most programs
 - This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process
- It helps optimize resource utilization since it's aware of which cores are used globally within a process.
 - Goal is to maximize processor core utilization via work-stealing



See earlier lessons on "*The Java Fork-Join Pool Internals: Work Stealing*"

Overview of the Common Fork-Join Pool


- A static common pool is available & appropriate for most programs
 - This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process
- It helps optimize resource utilization since it's aware of which cores are used globally within a process.
 - Goal is to maximize processor core utilization via work-stealing
- This "global" vs "local" resource management tradeoff is common in computing & other domains



See blog.tsia.com/blog/local-or-global-resource-management-which-model-is-better

Overview of the Common Fork-Join Pool


- A static common pool is available & appropriate for most programs
 - This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process
 - It helps optimize resource utilization since it's aware of which cores are used globally within a process.
- This pool is also used by the Java parallel streams framework

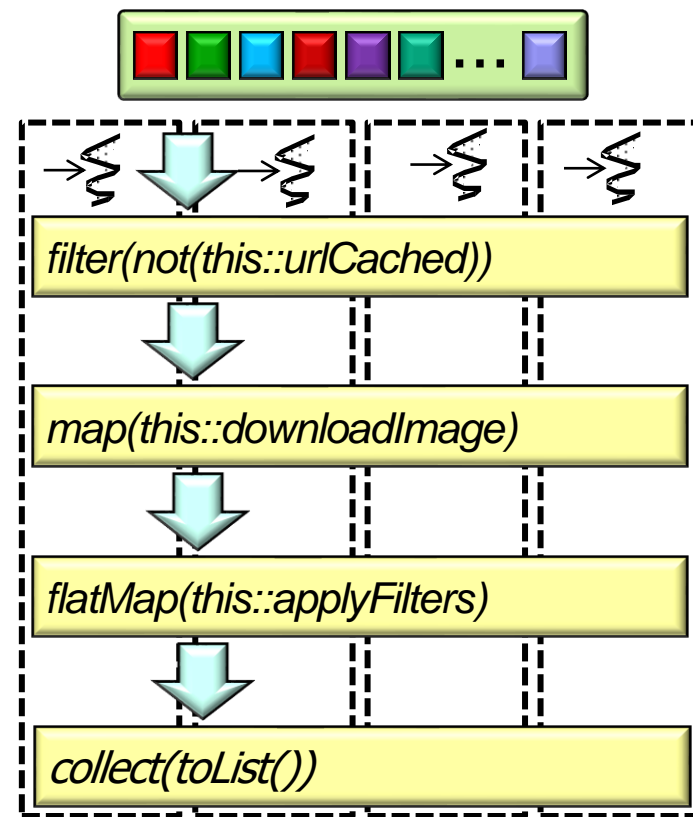

See dzone.com/articles/common-fork-join-pool-and-streams

Overview of the Common Fork-Join Pool

- A static common pool is available & appropriate for most programs
 - This pool's used by any ForkJoin Task that's not submitted to a specified pool within a process
 - It helps optimize resource utilization since it's aware of which cores are used globally within a process.
 - This pool is also used by the Java parallel streams framework
 - & the completable futures framework

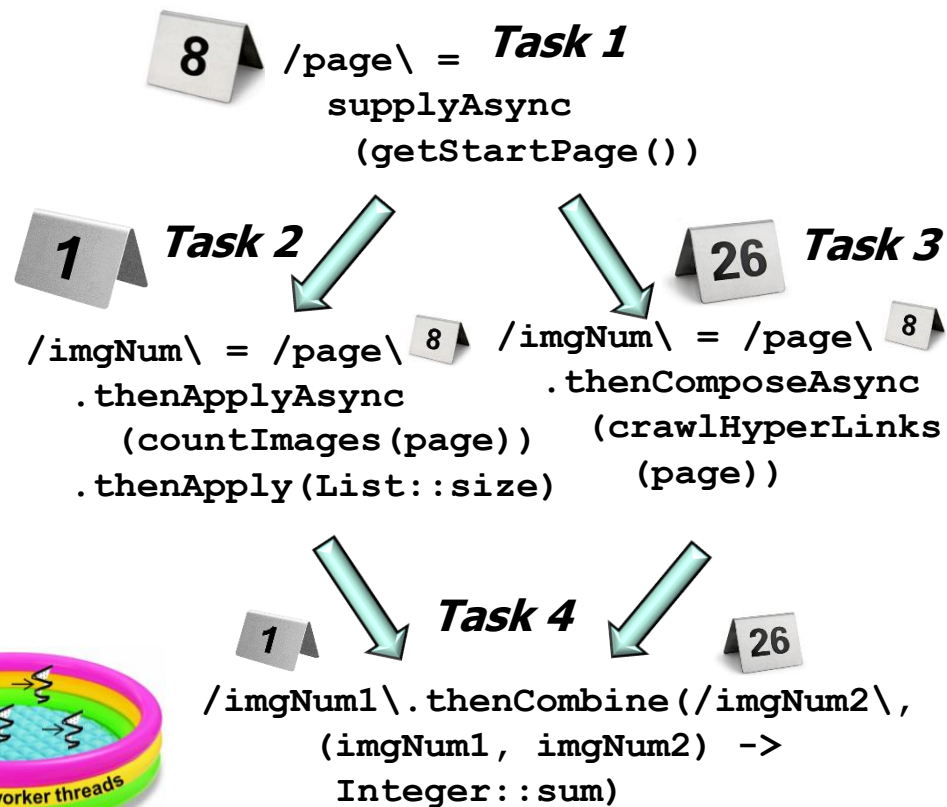

See dzone.com/articles/common-fork-join-pool-and-streams

Overview of the Common Fork-Join Pool

- By default the common fork-join pool has one less thread than the # of cores

```
ForkJoinPool makeCommonPool() {
```

```
...
```

```
parallelism = Runtime
```

```
.getRuntime()
```

```
.availableProcessors() - 1;
```

```
...
```

*Sets 'parallelism' to three
on a quad-core processor*



Overview of the Common Fork-Join Pool

- By default the common fork-join pool has one less thread than the # of cores

```
ForkJoinPool makeCommonPool() {  
    ...  
    parallelism = Runtime  
        .getRuntime()  
        .availableProcessors() - 1;  
    ...  
}
```

Returns three on a quad-core processor


```
System.out.println  
    ("The parallelism in the"  
     + "common fork-join pool is "  
     + ForkJoinPool  
        .getCommonPoolParallelism());
```



See github.com/douglasraigschmidt/LiveLessons/blob/master/SearchForkJoin

Overview of the Common Fork-Join Pool

- By default the common fork-join pool has one less thread than the # of cores

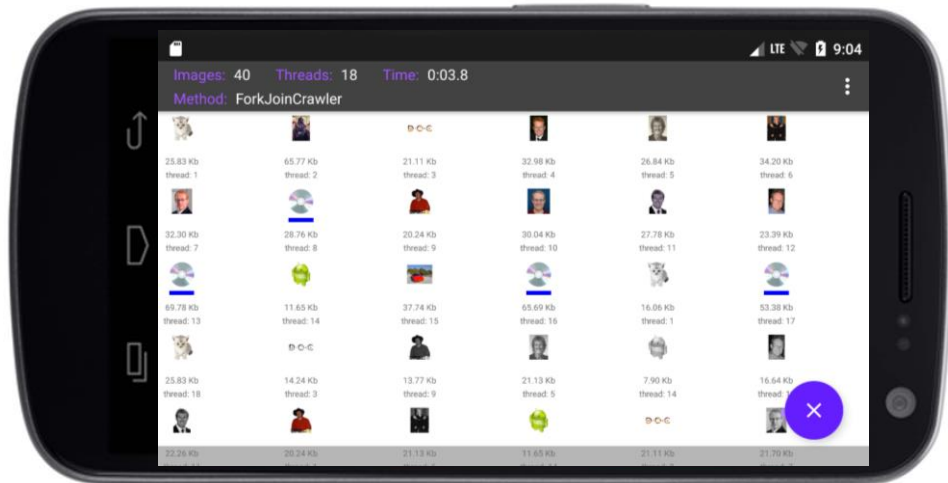


The invoking thread, e.g., the main (UI) thread, is also included in the pool

A program can therefore leverage all processor cores!

Overview of the Common Fork-Join Pool

- However, the default # of threads in the fork-join pool may be inadequate

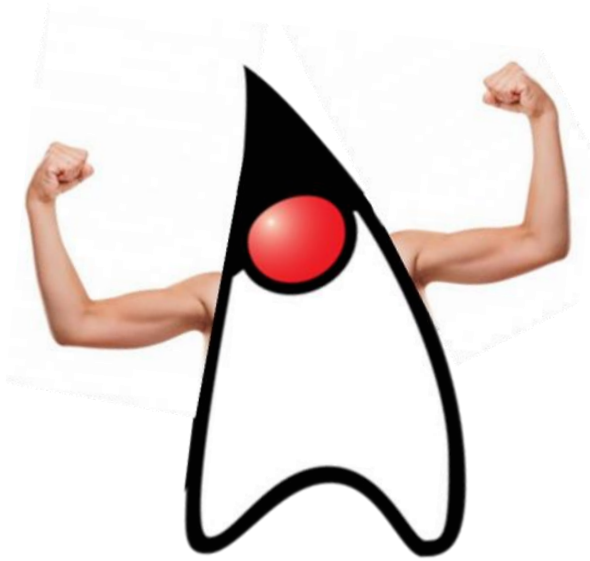

Overview of the Common Fork-Join Pool

- However, the default # of threads in the fork-join pool may be inadequate
 - e.g., problems occur when blocking operations are used in the common fork-join pool



doug.jpg



doug-circle.png




dougs-small.jpg



ironbound.jpg



ka.png




kitten.png



lil_doug.jpg



robot.png




uci.png



wm.jpg


*e.g., downloading more
images than # of cores*

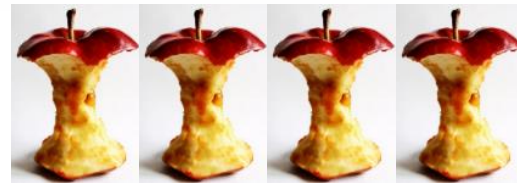

These problems may range from underutilization of processor cores to deadlock..

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically

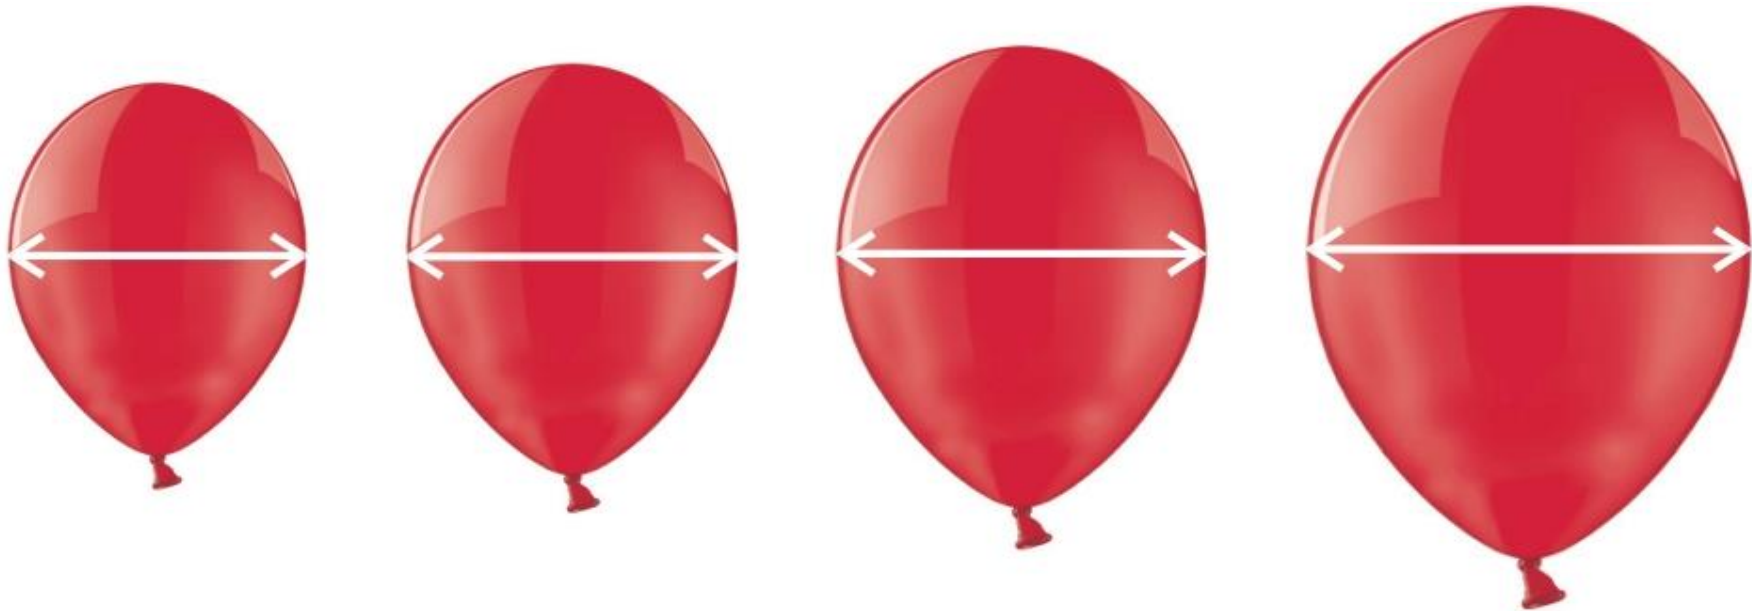

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property

```
String desiredThreads = "10";  
System.setProperty  
("java.util.concurrent." +  
 "ForkJoinPool.common." +  
 "parallelism",  
 desiredThreads);
```




It's hard to estimate the total # of threads to set in the common fork-join pool

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - Modifying this property affects all common fork-join usage in a process!

```
String desiredThreads = "10";  
System.setProperty  
("java.util.concurrent." +  
 "ForkJoinPool.common." +  
 "parallelism",  
 desiredThreads);
```

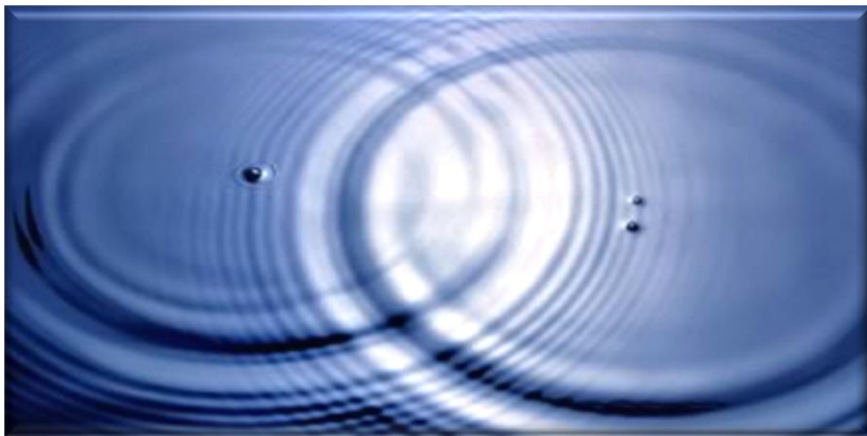

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - Modifying this property affects all common fork-join usage in a process!
 - This property can be changed only before the common fork-join pool is initialized
 - It's initialized "on-demand" the first time it's used

```
String desiredThreads = "10";  
System.setProperty  
("java.util.concurrent." +  
 "ForkJoinPool.common." +  
 "parallelism",  
 desiredThreads);
```



See en.wikipedia.org/wiki/Lazy_initialization

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property

```
String desiredThreads = "10";  
System.setProperty  
("java.util.concurrent." +  
 "ForkJoinPool.common." +  
 "parallelism",  
 desiredThreads);
```



Another approach is thus needed to increase the fork/join pool size automatically

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - By using a ManagedBlocker



Interface `ForkJoinPool.ManagedBlocker`

Enclosing class:

`ForkJoinPool`

```
public static interface ForkJoinPool.ManagedBlocker
```

Interface for extending managed parallelism for tasks running in `ForkJoinPools`.

A `ManagedBlocker` provides two methods. Method `isReleasable()` must return `true` if blocking is not necessary. Method `block()` blocks the current thread if necessary (perhaps internally invoking `isReleasable` before actually blocking). These actions are performed by any thread invoking `ForkJoinPool.managedBlock(ManagedBlocker)`. The unusual methods in this API accommodate synchronizers that may, but don't usually, block for long periods. Similarly, they allow more efficient internal handling of cases in which additional workers may be, but usually are not, needed to ensure sufficient parallelism. Toward this end, implementations of method `isReleasable` must be amenable to repeated invocation.


Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - By using a ManagedBlocker
 - Temporarily add worker threads to the common fork-join pool



Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - By using a ManagedBlocker
 - Temporarily add worker threads to the common fork-join pool
- Useful when tasks wait on I/O, synchronizers, or blocking queues

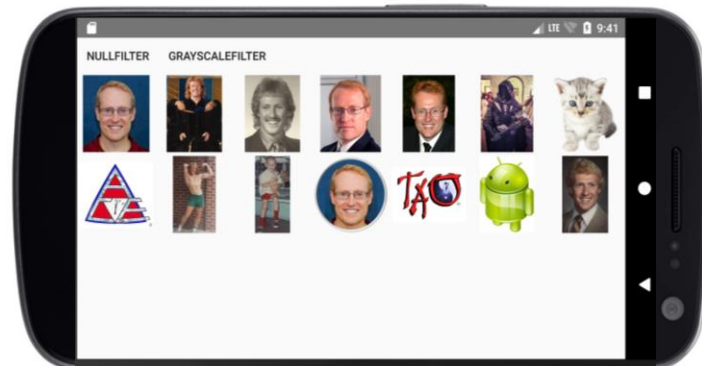

ManagedBlockers can only be used with the common fork-join pool..

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
 - By using a ManagedBlocker
 - Temporarily add worker threads to the common fork-join pool
 - Useful when tasks wait on I/O, synchronizers, or blocking queues
 - It's helpful to encapsulate the ManagedBlocker mechanism

```
SupplierManagedBlocker<T> mb =  
    new SupplierManagedBlocker<>  
        (supplier);
```

...

```
ForkJoinPool.managedBlock(mb);  
return mb.getResult();
```



See lesson on “*The Java Fork-Join Pool: Applying the ManagedBlocker Interface*”

Overview of the Common Fork-Join Pool

- The common pool size can thus be expanded & contracted programmatically
 - By modifying a system property
- By using a ManagedBlocker
 - Temporarily add worker threads to the common fork-join pool
 - Useful when tasks wait on I/O, synchronizers, or blocking queues
 - It's helpful to encapsulate the ManagedBlocker mechanism
 - ForkJoinPool reclaims threads during periods of non-use & reinstates them on later use



End of Maximizing Processor Core Utilization with the Java Common Fork-Join Pool